


## Adapter module ADP-N3S-EDP

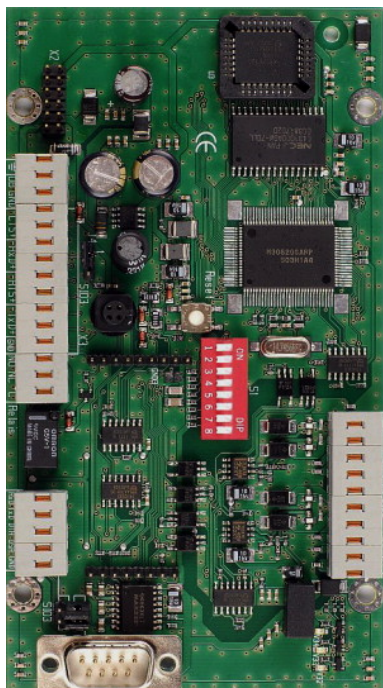

### Part-No. FX808379

Same as FX808381, but designed for connection of an additional FACP in an installed redundant data bus of a fire brigade indicating panel FAT 3000 to an adapter module ADP-N3EU-EDP. In contrast to ADP-N3EU-EDP, the ADP-N3S-EDP does not supply power for the redundant operation. With a redundant FlexES Control panel, the redundant remote control of the fire brigade periphery requires an ADP-N3S-EDP.

Operating voltage	10 ... 30 V DC
Quiescent current @ 12 V DC	approx. 60 mA
Quiescent current @ 24 V DC	approx. 30 mA
Contact load relay	30 V DC/ 1 A
Ambient temperature	0 °C ... 50 °C
Storage temperature	-10 °C ... 60 °C
Connection terminal	max 2 x 0.8 mm <sup>2</sup>
Weight	approx. 100 g
Dimensions	W: 80 mm H: 150 mm D: 30 mm