1/2 type




## H62Z1235AM-MP

## 62X 12.5-775mm F3.5 for 1/2 type Cameras, Motorized Zoom C-Mount, Megapixel

with Video Auto Iris

| Model No.              |        | H62Z1235AM-MP                         |                | Effective                         | Front          | $\phi$ 98.5mm                     |                |
|------------------------|--------|---------------------------------------|----------------|-----------------------------------|----------------|-----------------------------------|----------------|
| Focal Length           |        | 12.5mm - 775mm                        |                | Lens Aperture                     | Rear           | $\phi$ 17.5mm                     |                |
| Max. Aperture Ratio    |        | 1:3.5                                 |                | Back Focal Length                 |                | 42.29mm                           |                |
| Max. Image Format      |        | 6.4mm x 4.8mm( \$\phi\$ 8mm)          |                | Flange Back Length                |                | 17.53mm                           |                |
| Operation Range        | Iris   | F3.5 - Close                          |                | Mount                             |                | C-Mount                           |                |
|                        | Focus  | 5.0m - Inf.                           |                | Filter Size                       |                | M107 P=1.0mm                      |                |
|                        | Zoom   | 12.5mm - 775mm                        |                | Tripod Screw                      |                | 1/4 -20UNC X 2                    |                |
| Control                | Iris   | Video Auto Iris                       |                | Dimensions                        |                | W150mm x H135mm x D367.5mm        |                |
|                        | Focus  | Motorized                             |                | Weight                            |                | 5300g                             |                |
|                        | Zoom   | Motorized                             |                |                                   |                |                                   |                |
| Object Dimension       | 12.5mm | 245.4cm X 184.2cm                     |                |                                   |                |                                   |                |
| at M.O.D.              | 775mm  | 3.94cm X 2.96cm                       |                |                                   |                |                                   |                |
| Angle of View          | D      | 1/2 type                              | 35.47° - 0.58° | 1/3 type                          | 27.06° - 0.44° | 1/4 type                          | 20.44° - 0.33° |
|                        | Н      |                                       | 28.77° - 0.47° |                                   | 21.78° - 0.35° |                                   | 16.41° - 0.26° |
|                        | V      |                                       | 21.78° - 0.35° |                                   | 16.41° - 0.26° |                                   | 12.34° - 0.20° |
|                        |        | Iris                                  |                | Focus                             |                | Zoom                              |                |
| Supply Voltage         |        | DC8.5-16V                             |                | DC6-12V                           |                | DC6-12V                           |                |
| Current                |        | 30mA or less                          |                | 60mA or less                      |                | 60mA or less                      |                |
| Response Time          |        | _                                     |                | Approx. 7.5 sec. (when 10V input) |                | Approx. 8.5 sec. (when 10V input) |                |
| Preset Potentiometer   |        | -                                     |                | _                                 |                | _                                 |                |
| Light Weighting method |        | Adjustable between Average - Peak     |                |                                   |                |                                   |                |
| Input Signal           |        | Video Signal ( V or VS)               |                |                                   |                |                                   |                |
| Iris Accuracy          |        | ±15% at Video Signal Level            |                |                                   |                |                                   |                |
| Sensitivity Adjustment |        | 0.4V(p-p) - 1.0V (p-p) (Video Signal) |                |                                   |                |                                   |                |
| Input Impedance        |        | High Impedance                        |                |                                   |                |                                   |                |
| Operating Temperature  |        | -10°C - +50°C                         |                |                                   |                |                                   |                |

## **Dimensions**

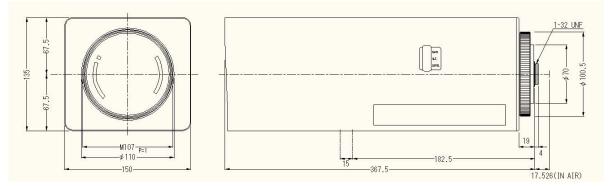

## Wiring Diagram

