

# SPC-7000

System Control Keyboard




## Key Features


- 5" TFT touch LCD
- Network cameras / SSM control
- User-friendly design and easy-to-use keypad
- 3 Axis joystick to control PTZ function
- Detachable joystick / jogshuttle for universe use (Right / Left hand use)
- USB interface support (1ea for SSM, 1ea for image snapshot / Upgrade)
- Fast camera-tile mapping, Config import / export

## Dimensions

Unit : mm (inch)

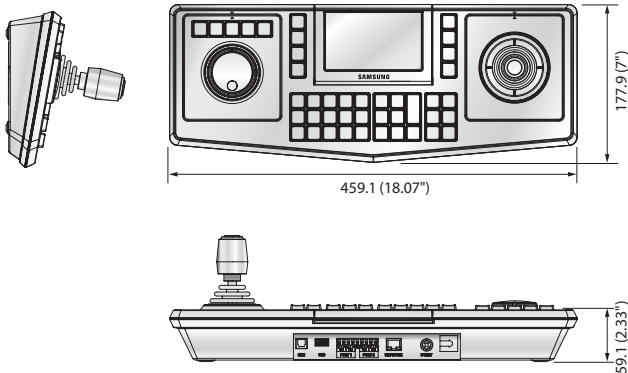

## System Configuration

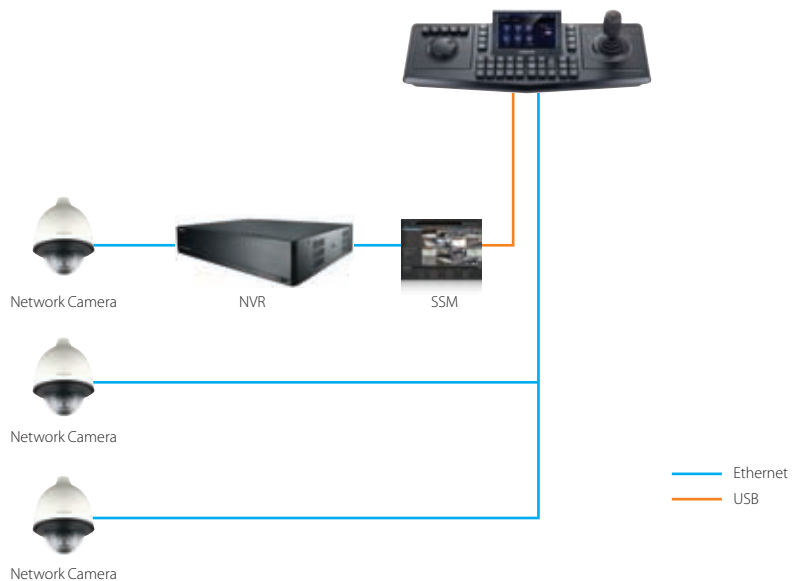

\* The control for Analog Camera/DVR will be ready on Oct.2016

## SPC-7000

COMMUNICATION	
Control Equipment	Network camera / SSM
Interface	Ethernet (Network camera), USB (SSM) 1ea, USB 1ea (Upgrade, Config import/export, Image snapshot)
Interface Protocol	Ethernet: SUNAPI USB: Dedicated
Units to Control	Max. 255ea(Network Camera), 1ea (SSM)
Network Protocol	TCP, HTTP, DHCP, IPv4
OPERATIONAL MECHANICAL	
LCD Display	5" TFT LCD
Joystick	3 Axis twist zoom
Jog Shuttle	SSM playback control
CONTROL	
Camera	Pan/Tilt/Zoom, Focus, Auto focus, Preset, Group, Tour, Swing, Trace, Auto tracking, Alarm off/on, Freeze
Video Wall	Camera-tile (Channel) mapping, Layout (Display division mode) change
Recorder	Recording / Playback control, Alarm off, Menu
Device Management	Built-in device registration / Modification on LCD
User Management	Admin + 9 operators
Import / Export	Configuration import / export
MISCELLANEOUS	
Video Snapshot	Still image (Network camera) export using USB memory
Input	Alphabet input (Virtual keyboard)
Language	English, Spanish, French, Italian, German, Turkish, Polish, Russian, Korean, Chinese, Japanese
ENVIRONMENTAL	
Operating Temperature	0°C ~ 40°C (+32°F ~ +104°F)
Operating Humidity	20 ~ 85%
ELECTRICAL	
Input Voltage	12V DC
Power Consumption	Max. 6.4W
MECHANICAL	
Dimensions (WxHxD)	459.1 x 59.1 x 177.9mm (18.07" x 2.33" x 7")
Weight	1.5Kg (3.3 lb)

\* The latest product information / specification can be found at <http://security.hanwhatechwin.com>