

HRD-1642

16CH 4M Analog HD DVR




Key Features

- 16CH 4MP AHD DVR
- TVI, CVI (Max. 2MP), Analog camera input support
- Up to 240 / 200 (4M)fps recording rate
- Up to 480 / 400 (1080p)fps recording rate
- HDMI / VGA video output
- 16CH audio inputs / 1CH audio output
- Up to 8 Internal HDDs
- Coaxial Cable (Pelco-C, ACP)
- Smart phone support (Android, iOS)

Dimensions

Unit : mm (inch)

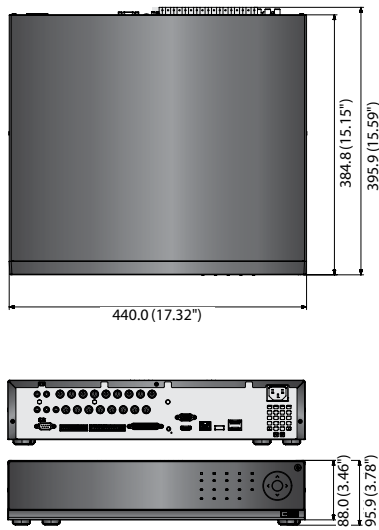

HRD-1642

DISPLAY		
Video	Inputs	16Channel BNC : AHD (4MP), TVI (2MP), CVI (2MP), NTSC / PAL
	Resolution	2560 x 1440, 1920 x 1080, 1280 x 720, 960 x 480, 704 x 480, 960 x 576, 704 x 576
Live	Frame Rate	480fps, 400fps
	Resolution	2560 x 1440, 1920 x 1080, 1280 x 720, 960 x 480, 704 x 480, 960 x 576, 704 x 576
	Multi Screen Display	1 / 4 / 7 / 9 / 13 / 16 / 16A / PIP / Sequence
PERFORMANCE		
Operating System	Embedded	Linux
	Compression	H.264, WiseStream
Recording	Record Rate	NTSC : Up to 240fps@4MP / PAL : Up to 200fps@4MP NTSC : Up to 480fps@1920 x 1080 / PAL : Up to 400fps@1920 x 1080 NTSC : Up to 480fps@1280 x 720, 928 x 480, 704 x 480, 704 x 240, 352 x 240 PAL : Up to 400fps@1280 x 720, 928 x 576, 704 x 576, 704 x 288, 352 x 288
	Mode	Manual, Schedule (Continuous / Event), Event (Pre / Post), Time Lapse (1 ~ 30fps (N), 1 ~ 25fps (P))
	Event	Video Loss, Motion (Level 1 ~ 10), Alarm Input (16), Tampering (Level Low, Medium, High)
	Overwrite Modes	Continuous
	Pre-alarm	Up to 30 Sec (5, 10, 20, 30 Sec)
Search & Playback	Post-alarm	Up to 6 Hour (5, 10, 20, 30 Sec, 1, 3, 5, 10, 20 Min, 1, 2, 3, 4, 5, 6 Hour)
	Search Mode	Date / Time, Event, Back up, POS (SD Signal only), Motion (※ All Search Included Preview Function)
Network (IPv4)	Playback Function	Fast forward / Backward (2x, 4x, 8x, 16x, 32x, 64x) *Backward play with I-frame only Slow forward / Backward (1/2x, 1/4x, 1/8x) Step Forward / Backward ※ Backward Play with I-frame only
	Transmission Speed	Record Stream : 4M : 15fps, 1080p / 720p / WD1 / 4CIF / CIF (NTSC : 30fps, PAL : 25fps) Network Stream : WD1 / 4CIF : 12fps, 2CIF / CIF / QVGA / QCUF (NTSC : 30fps, PAL : 25fps)
	Bandwidth	Up to 64Mbps
	Bandwidth Control	Selectable
	Stream	Record Stream and Network Stream Selectable (at Monitoring Viewer)
Smart Phone	Max. Remote Users	Search (3) / Live Unicast (10) / Live multicast (20)
	Protocol Support	TCP/IP, DHCP, PPPoE, SMTP, NTP, HTTP, DDNS, RTP, RTSP, SNMP
	Monitoring	SSM, Web Viewer, SmartViewer, iPOLiS Mobile Viewer
	Platform	Android, iOS
Storage	Protocol Support	RTP, RTSP, HTTP
	Control	Live(8ch) : Multi-Profile Support Playback (1ch)
	Max. Remote Users	Search (3), Live Unicast (10), Multicast (20)
Security	Internal HDD	Up to 8 SATA HDDs (0 ~ 8TB HDDs)
	External (e-SATA Interface)	e-SATA, USB (for Backup)
INTERFACE	File Format (Backup)	BU (DVR Player), SEC (Include Player), AVI
	Password Protection	1 Admin, 10 Group, 10 User per 1 Group
Monitors	Data Authentication	Watermark
	VGA	1 VGA (1920 x 1080, 1280 x 1024, 1280 x 720)
Audio	HDMI	1 HDMI (4K (3840 x 2160), 2K (2560 x 1440), 1920 x 1080, 1280 x 1024, 1280 x 720)
	Spot Composite	BNC (1CH) ※ Included OSD On Screen, Multi Mode Support
Alarm	Inputs / Output	16CH Line in (Built-in 4CH, Option : Audio Extension Cable) / 1CH Line out
	Compression	G.711
Connections	Sampling Rate	8KHz
	Inputs / Output	Terminal 16 Inputs (NO/NC) / Terminal 4 Relay Outputs (NO/NC), Rating : 30V DC / 2A, 250V AC / 0.25A
GENERAL	Remote Notification	Notification via e-mail
	Ethernet	1 RJ45 10/100/1000 Base-T
	Serial Interface	RS-485 (Full Duplex) for PTZ, Samsung System Keyboard
	USB	1 port (USB 3.0, Rear), 1 port (USB 2.0, Front)
	e-SATA	2 External SATA ports
LAUAGE	Application Support	Mouse, IR Remocon
	RS-485 Protocol	Samsung-E / Samsung-T / Pelco-D / Pelco-p / Panasonic / Phillips / AD / DIAMOND / ERNA / KALATEL / VCL TP / VICON / ELMO / GE
	Coax Protocol	NTSC / PAL : Pelco-C (Coaxitron), AHD : ACP (AHD Coax Protocol)
Electrical	Input Voltage / Current	100 ~ 240 VAC ±10%, 50/60 Hz
	Power Consumption	Max. 62W (1 x 2T HDD)
Environmental	Operating Temperature	+0°C ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	20% ~ 85% RH
Mechanical	Dimensions (WxHxD)	440 x 88.0 x 384.8mm (17.32" x 3.46" x 15.15")
	Weight (With hard disks)	5.67Kg (12.50 lb)
GUI	GUI	English, French, German, Spanish, Italian, Russian, Polish, Czech, Turkish, Netherlands, Portuguese, Swedish, Danish, Rumania, Serbia, Croatia, Hungary, Greek, Finnish, Norwegian, Korean, Japanese, Chinese (Traditional), Thai
	Web Browser	English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese (Simplified), Japanese, Thai

* The latest product information / specification can be found at hanwha-security.com
 * Design and specifications are subject to change without notice.