# **DTWRX**

## TELEMETRY DATA RECEIVER FOR WIPER AND WASHER REMOTE CONTROL

## **MAIN FEATURES**

Remote control of wiper and washer pump of WASPT series in stand-alone housings

RS485 communication


Remote controllable up to 1200m (3937ft) from the control keyboard

## **DESCRIPTION**

The DTWRX receiver is an optional board for remote control of wiper and washer pump. It works only with WASPT pump series, where it can be easily installed thanks to its connector. It allows the control of wiper and washer functions when the housing is stand-alone, not mounted on a P&T and then without telemetry receiver.



CARD FOR REMOTE CONTROL OF WIPER/WASHER PUMP WITH WASPT FOR STAND-ALONE CAMERA HOUSINGS

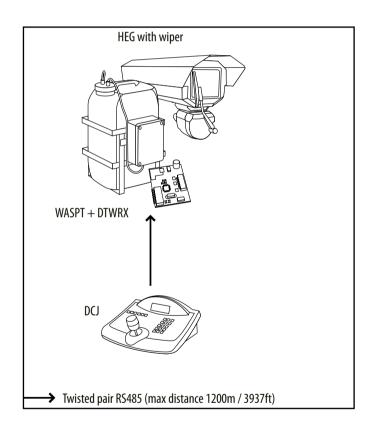

#### TECHNICAL DATA

#### **GENERAL**

2 functions: WIPER, WASHER

31 selectable addresses through Dip Switch

Serial input RS-485

2 status LED: Stand-by and receiver control

#### MECHANICAL

Dimensions: 43x56x13mm (1.7x2.2x0.51in)

Unit weight: 0.02kg

#### **ELECTRICAL**

Power consumption: 0.5W

#### **PROTOCOLS**

PELCO D (2400, 9600 baud)

VIDEOTEC MACRO (9600, 38400 baud)

#### COMMUNICATIONS

Half duplex RS-485 serial interface for keypad telemetry data reception (maximum distance 1200m/3940ft) and from SM matrix range (maximum distance 1200m/73940ft)

#### **ENVIRONMENT**

Indoor/Outdoor

Operating temperature: from -10°C up to +60°C

At -10°C the electronic protection device DTWRX intervenes

#### CERTIFICATIONS

Electrical safety (CE): EN60950-1

Electromagnetic compatibility (CE): EN50130-4, EN61000-6-3, FCC Part 15 (Class B)

**EAC** certification


RELATED PRODUC	TS	
DCTEL	Matrix and telemetry control keyboard	
DCJ	Keyboard for video and telemetry control	
HEG	Large-sized housing	
HOV	Side-opening aluminium housing	
NXM	Housing for installation in aggressive environments	
NXL	Large housing for aggressive environments	
WASPTOV5L5M00	Water tank 5I (1 gal), pump with delivery up to 5m (16ft), IN 230Vac-24Vac-120Vac	
WASPT0V23L5M00	Water tank 23I (6 gal), pump with delivery up to 5m (16ft), IN 230Vac-24Vac-120Vac	
WASPT0V23L11M00	Water tank 23l (6 gal), pump with delivery up to 11m (36ft) with water floating, IN 230Vac-24Vac-120Vac	
WASPT1V23L30M00	Water tank 23l (6 gal), pump with delivery up to 30m (98ft) with water floating, IN 230Vac	
WASPT3V23L30M00	Water tank 23l (6 gal), pump with delivery up to 30m (98ft) with	

water floating, IN 120Vac

PACKAGE			
<b>Model Number</b>	Weight	Dimensions (WxHxL)	Master carton
DTWRX	-	8.5x5.5x11.5cm (3.4x2.2x	4.5in) -

## TECHNICAL DRAWINGS

Sizes in millimeters.



DTWRX